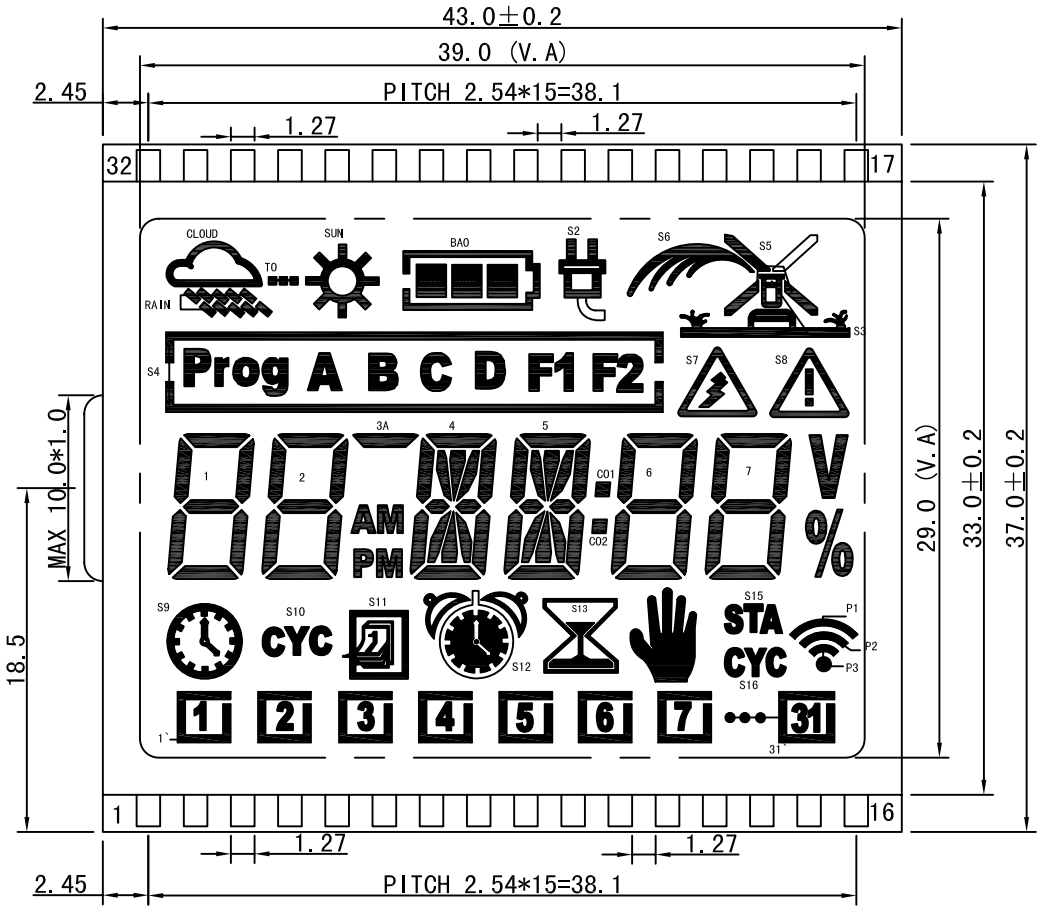

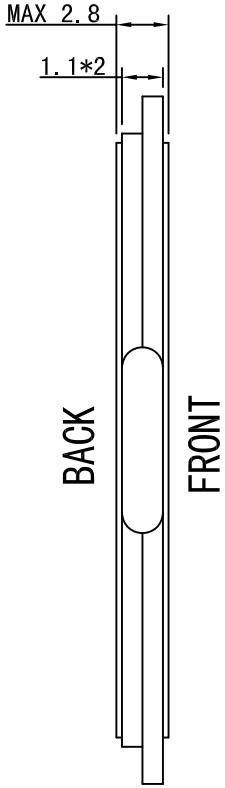



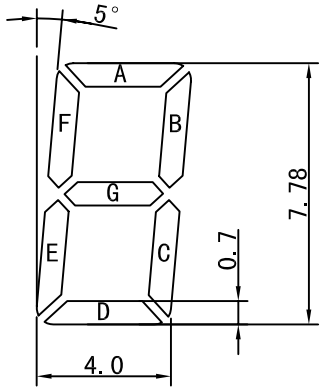

PIN	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31	32
COM1	COM1				1A	1B	2F	2B	AM	4K	S11	5K	6F	6A	6B	7F	7A	7B	V	Prog	S8	S7	S4	BA0	SUN	5A	5J	4A	4J	3A	2A	1F
COM2		COM2			1G	1C	2E	2C	PM	4L	5H	5L	6E	6G	6C	7E	7G	7C	%	S2	S3	F2	A	BA3	TO	5C	5M	4C	4M	4H	2G	1E
COM3			COM3		1D	2`	3`	4`	5`	4N	5G	5N	C01	6D	6`	7`	7D	S16	31`	P1	S5	F1	B	BA2	RAIN	5D	5P	4D	4P	4G	2D	1`
COM4				COM4	S9	2	3	4	5	4R	5F	5R	C02	S14	6	7	STA	P3	31	P2	S6	D	C	BA1	CLOUD	S13	5Q	S12	4Q	4F	S10	1

NOTES:

1. VIEWING ANGLE: 6:00 O'CLOCK
2. DISPLAY MODE:POSITIVE/REFLECTIVE/TN
3. DRIVING VOLTAGE:3.0V,DUTY:1/4,BIAS:1/3
4. OPERATING TEMP.:-20° C TO 70° C
5. STORAGE TEMP.:-30° C TO 80° C
6. CONNECTOR:RUBBER
7. SOME CROSS IN THE VIEW

VER.	MODIFY CONTENTS	DATE	DESIGN
6			
5			
4			
3			
2	MODIFY THE DRAW	10/07-08	X.C.T
1	ADD LABEL	30/05-08	F.C

XIAMEN OCULAR LCD DEVICES CO.,LTD

PART NO. GD-5352W

DESIGN BY

CHECKED BY

APP BY

TOLERANCES UNLESS OTHERWISE STATED
.X ±0.20
.XX ±0.10 ANGLES±1°
ALL DIMENSIONS IN MM
UNLESS OTHERWISE STATED

APPLICATION:
☐ Instrument ☐ Audio Equipments ☐ Watch&Clock
☐ Telephone ☐ Automobile ■ Other
☐ Home Appliancess ☐ Air-condition
SAMPLE: ☐ Yes ■ No

COMPOSE TYPE:
☐ MONO X-STEP: " # MM "
☐ ALONG Y-STEP: " # MM "

SHEET 1 OF 1